

# DC 480/600kW Charger (Split Type)




TÜVRheinland®



Charging Dispenser

## Main Features

- CCS1 / CCS2 / CHAdeMO / GB/T EV Charging standard support
- IP55 for the dispenser and IP54 for the power cube with high protection and high reliability for harsh environment
- One CCS / GB/T standard 500A liquid cooling charging connector support with Any Cooling™ liquid cooling solution\*
- 250A or 300A CCS normal charging connector for the balance of cost and charging capacity
- OCPP 1.6J support with update firmware to 2.0, smart charge and power management support
- Easily configure the output power up to 480/600kW and the output voltage up to 1000V
- Full safety function with output contactor and fuse, EPO, SPD, leakage protection switch, insulation detect protection
- 7" LCD & touch screen
- Internal high precision AC and DC energy meter, VDE and PTB certification type\*
- LAN and LTE wireless support, RFID authorization and Mobile App payment support

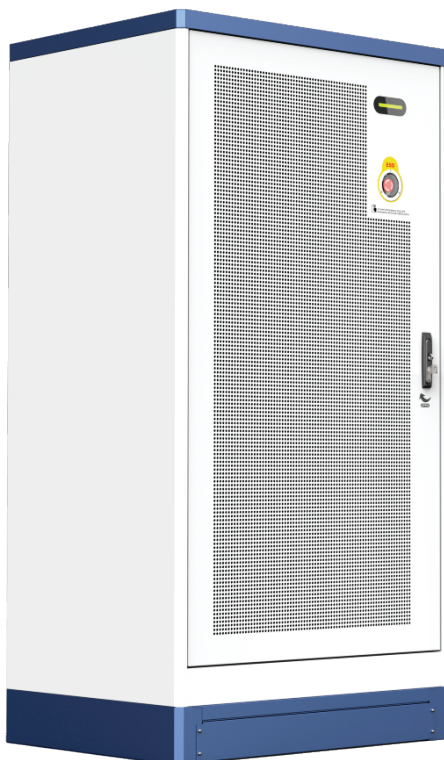

Power Cube



CCS2  
(Natural cooling)  
CCS2(N)  
CCS2(N)+CCS2(N)

### Natural Cool Cable

Maximum Output: 200A, 1000Vdc  
Connector: CCS, CHAdeMO, GB/T



CCS2  
(Liquid cooling)  
CCS2(L)  
CCS(N)+CCS2(L)

### Liquid Cool Cable

Maximum Output: 500A, 1000Vdc  
Connector: CCS, GB/T