

DC 600/800kW Charger (Split Type)



TÜVRheinland®




Charging Dispenser

Main Features

- CCS1 / CCS2 / CHAdeMO / GBT EV Charging standard support
- IP55 for the dispenser and IP55/65 for the power cube with high protection and high reliability for harsh environment
- One CCS / GBT standard 500A liquid cooling charging connector support with Any Cooling™ liquid cooling solution*
- 250A or 300A CCS normal charging connector for the balance of cost and charging capacity
- OCPP 1.6J support with update firmware to 2.0, smart charge and power management support
- Easily configure the output power up to 600/800kW and the output voltage up to 1000V
- Full safety function with output contactor and fuse, EPO, SPD, leakage protection switch, insulation detect protection
- 7" LCD & touch screen
- Internal high precision AC and DC energy meter, VDE and PTB certification type*
- LAN and LTE wireless support, RFID authorization and Mobile App payment support

EM600K4

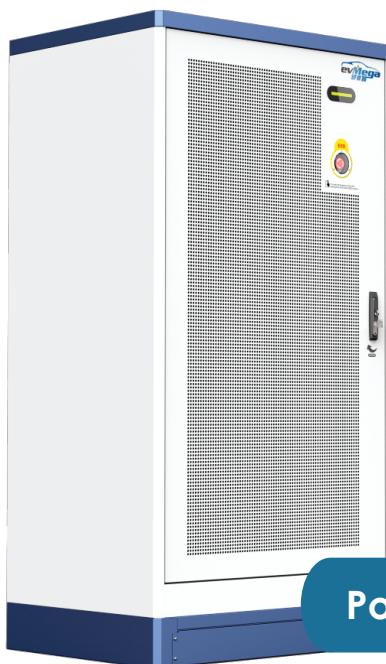

EM800K6



Power Cube