

DC 60/120/150kW Charger





DC | DC 150kW Charger
Floor Standing

Main Features

- CCS-1 or CC2-2 / GB/T / CHAdeMO and AC type 2 configuration and option
- IP65 design with high protection & reliability for harsh environment
- OCPP1.6J support, 2.0 firmware update support
- Power transfer between the 2 DC connectors, and also can output at the same time for the 2 DC connectors
- From 60kW to 150kW charging power configuration 22kW AC type 2 charging socket support*
- Full safety function with output contactor and fuse, EPO, SPD, RCD, leakage switch, insulation detector protection
- 7" LCD & touch screen
- Multiple charging modes: Auto basis, Time basis, Amount basis, Energy basis, SOC basis
- Multiple power distribution modes: Standalone, Current Switch, Plug Switch, Full Hold, Master Slave
- Internal high precision DC energy meter and optional AC meter

Heat Exchanger (IP65)

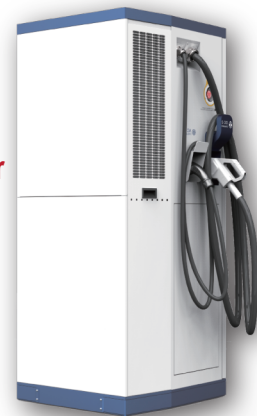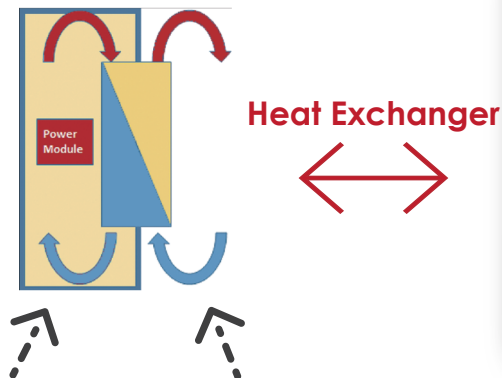

- IP65 make a **sealed environment** to protect the power module
- Internal air flow to cool down the power module

- Outside air flow to cool down the Heat Exchanger
- Use a high efficiency Heat Exchanger to bring the heat out

IP65

- Works in high efficiency & insulates the Power Module from dust moisture.
- Less likelihood of service downtime. Hence, product life time will be longer.